


**DFLK-D 9 SUB/B**

Order No.: 2287135

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2287135>

VARIOFACE panel feed-through module, for direct coupling of single signal lines of up to 2.5 mm<sup>2</sup>, with D-Subminiature socket strip, 9 pos.

**Commercial data**

GTIN (EAN)	 4 017918 056032
sales group	I011
Pack	5 pcs.
Customs tariff	85369010
Catalog page information	Page 310 (IF-2011)

**Product notes**

WEEE/RoHS-compliant since:  
05/08/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Nominal voltage $U_N$	125 V AC/DC
Max. current carrying capacity per branch	2.5 A
Max. total current of all branches	22.5 A
Number of positions	9

Width	39 mm
Height	58.4 mm
Depth	33 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Assembly instructions	In rows with zero spacing
Standards/regulations	DIN EN 50178
Standard - Electrical safety	Air and creepage distances DIN EN 50178
Pollution degree	2
Surge voltage category	II

#### Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	D-SUB connection
Connection method	D-SUB socket
Number of positions	9

#### Certificates / Approvals



Certification

CUL, GOST, UL

Accessories		
Item	Designation	Description
<b>Cable/conductor</b>		
2302434	CABLE D-SUB-S-S-S/.../.../...	Shielded round cable, assembled with two D-SUB male connectors, variable cable length
2302340	CABLE D-SUB-S/.../.../...	Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length
2299987	CABLE-D 9SUB/B/S/ 50/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 0.5 m
2299990	CABLE-D 9SUB/B/S/100/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1 m
2300009	CABLE-D 9SUB/B/S/150/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1.5 m
2302010	CABLE-D 9SUB/B/S/200/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 2 m
2302023	CABLE-D 9SUB/B/S/300/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 3 m
2302036	CABLE-D 9SUB/B/S/400/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 4 m
2302049	CABLE-D 9SUB/B/S/600/ KONFEK/S	Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 6 m
2926360	CABLE-D- 9SUB/M/OE/0,25/ S/0,5M	Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 0.5 m.
2926373	CABLE-D- 9SUB/M/OE/0,25/ S/1,0M	Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1 m.
2926386	CABLE-D- 9SUB/M/OE/0,25/ S/1,5M	Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1.5 m.
2926399	CABLE-D- 9SUB/M/OE/0,25/ S/2,0M	Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 2 m.
2926409	CABLE-D- 9SUB/M/OE/0,25/ S/3,0M	Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 3 m.
2926412	CABLE-D- 9SUB/M/OE/0,25/ S/4,0M	Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 4 m.




2926425	CABLE-D- 9SUB/M/OE/0,25/S/6,0M	Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 6 m.
---------	--------------------------------	---

**General**

2900909	CABLE-D- 9SUB-M-OE-0,25-S/...	Shielded cable with a 9-pos. D-SUB pin strip and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: variable.
---------	-------------------------------	--

**Diagrams/Drawings**

Dimensioned drawing

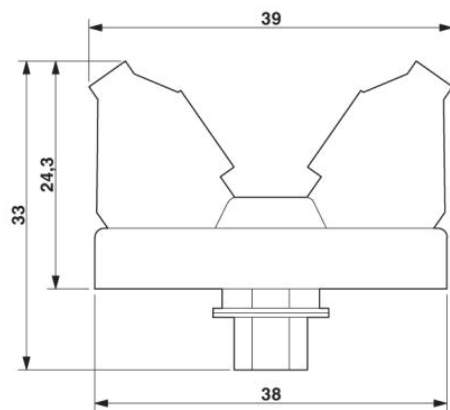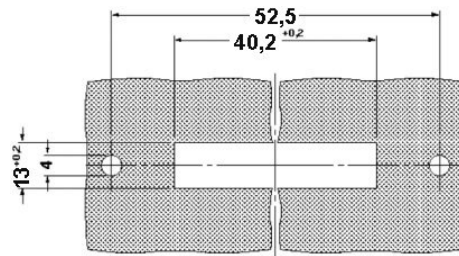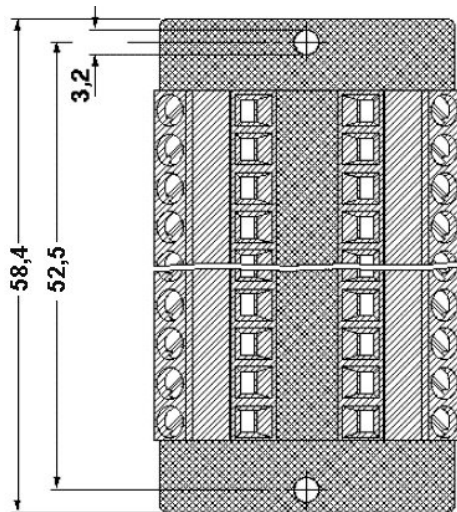

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;