

FL IF 2FX SC-D

Order No.: 2832425

The illustration shows a version with front connection

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2832425>FO media module for connecting 100Base-FX multimode glass fibers
(1300 nm), connection direction downwards


Ethernet

Product notes

WEEE/RoHS-compliant since:
07/03/2007

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Commercial data

GTIN (EAN)	 4 017918 929138
sales group	K000
Pack	1 pcs.
Customs tariff	85176200
Catalog page information	Page 102 (AX-2011)

Technical data

Interfaces

Interface 1	Ethernet: 100Base-FX in acc. with IEEE 802.3
No. of ports	2
Connection method	SC connector
Transmission speed	100 MBit/s (connection direction downwards)

Transmission length	10000 m (maximum (depends on the fiber used))
Interface 2	Ethernet: 100Base-FX in acc. with IEEE 802.3
No. of ports	2
Connection method	SC connector
Transmission speed	100 MBit/s
Transmission length	2800 m (glass fiber with F-G 50/125 1.6 dB/km F800)
	6400 m (glass fiber with F-G 50/125 0.7 dB/km F1200)
	3000 m (glass fiber with F-G 62.5/125 2.6 dB/km F600)
	2800 m (glass fiber with F-G 50/125 1.6 dB/km F800)
Wavelength	1300 nm

Function

Basic functions	Media module for modular managed switch
-----------------	---

Supply voltage

Supply voltage	(via head station)
Typical current consumption	200 mA

General data

Width	31 mm
Height	75.7 mm
Depth	72.5 mm
Mounting type	In the host system
Type AX	Stand-alone
Weight	80 g
Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 55 °C (no condensation)
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Permissible humidity (operation)	10 % ... 95 % (no condensation)
Permissible humidity (storage/transport)	10 % ... 95 % (no condensation)
Housing material	PA
Noise emission	EN 61000-6-3/-4
Noise immunity	EN 61000-6-2:2005

Mechanical tests

Type of test	Shock test in acc. with IEC 60068-2-27
Test result	Operation: 25 g, 11 ms duration, semi-sinusoidal shock impulse

Type of test	Shock test in acc. with IEC 60068-2-27
Test result	Storage/Transport: 50 g, 11 ms duration, semi-sinusoidal shock impulse
Type of test	Vibration resistance in acc. with IEC 60068-2-6
Test result	Operation/Storage/Transport: 5 g, 150 Hz, Criterion 3
Inflammability class acc. to UL 94	V0

Conformity with EMC directives

Developed in acc. with standard	IEC 61000-6.2
Test standard	IEC 61000-4-2 (ESD)
Test result	Criterion B
Test standard	IEC 61000-4-3 (immunity to radiated interference)
Test result	Criterion A
Test standard	IEC 61000-4-4 (burst)
Test result	Criterion A
Test standard	IEC 61000-4-5 (surge)
Test result	Criterion A
Test standard	IEC 61000-4-6 (immunity to conducted interference)
Test result	Criterion A
Test standard	IEC 61000-4-8 (immunity to magnetic fields)
Test result	Criterion A
Test standard	EN 55022 (emitted interference)
Test result	Criterion A

Certificates / Approvals



Certification ABS, BV, CUL, DNV, GL, UL

Certification Ex: CUL-EX LIS, UL-EX LIS


Accessories		
Item	Designation	Description
Cable/conductor		
2313504	FL FOC PN-C-HCS-GI	HCS GI cable for indoor installation, duplex, 200/230 µm, sold by the meter with connectors, particularly suitable for Ethernet applications due to the high bandwidth, rugged PUR outer cable sheath, 8 mm outside diameter, color: green
2313410	FL FOC PN-C-HCS-GI-200/230	HCS-GI cable for inner laying, duplex 200/230 µm, by the meter without connector, with an increased bandwidth ideal for Ethernet applications, rugged PUR outer sheath, 8 mm outside diameter, color green.
2989161	FL MM PATCH 1,0 LC-SC	Assembled fiber optic cable, break-out cable, glass fiber multi-mode 50/125 µm, connector: LC/SC duplex, degree of protection: IP20, for installation in cable ducts or control cabinets, length: 1 meter
2901805	FL MM PATCH 1,0 SC-SC	Assembled FO cable, break out cable, multi-mode glass fiber 50/125 µm, connector: SC Duplex / SC-Duplex, protection type: IP20, for installation in cable ducts or control cabinets, length: 1 meter
2901805	FL MM PATCH 1,0 SC-SC	Assembled FO cable, break out cable, multi-mode glass fiber 50/125 µm, connector: SC Duplex / SC-Duplex, protection type: IP20, for installation in cable ducts or control cabinets, length: 1 meter
2901812	FL MM PATCH 1,0 SC-SCRJ	Assembled FO cable, break out cable, multi-mode glass fiber 50/125 µm, connector: SC Duplex / B-FOC (ST), protection type: IP20, for installation in cable ducts or control cabinets, length: 1 meter
2901809	FL MM PATCH 1,0 SC-ST	Assembled FO cable, break out cable, multi-mode glass fiber 50/125 µm, connector: SC Duplex / B-FOC, protection type: IP20, for installation in cable ducts or control cabinets, length: 1 meter
2989268	FL MM PATCH 2,0 LC-SC	Assembled fiber optic cable, break-out cable, glass fiber multi-mode 50/125 µm, connector: LC/SC duplex, degree of protection: IP20, for installation in cable ducts or control cabinets, length: 2 meter
2989268	FL MM PATCH 2,0 LC-SC	Assembled fiber optic cable, break-out cable, glass fiber multi-mode 50/125 µm, connector: LC/SC duplex, degree of protection: IP20, for installation in cable ducts or control cabinets, length: 2 meter
2901813	FL MM PATCH 2,0 SC-SCRJ	Assembled FO cable, break out cable, multi-mode glass fiber 50/125 µm, connector: SC Duplex / SCRJ, protection type: IP20, for installation in cable ducts or control cabinets, length: 2 meters
2901813	FL MM PATCH 2,0 SC-SCRJ	Assembled FO cable, break out cable, multi-mode glass fiber 50/125 µm, connector: SC Duplex / SCRJ, protection type: IP20, for installation in cable ducts or control cabinets, length: 2 meters

2901810	FL MM PATCH 2,0 SC-ST	Assembled FO cable, break out cable, multi-mode glass fiber 50/125 µm, connector: SC Duplex / B-FOC (ST), protection type: IP20, for installation in cable ducts or control cabinets, length: 2 meters
2901808	FL MM PATCH 5,0 SC-SC	Assembled FO cable, break out cable, multi-mode glass fiber 50/125 µm, connector: SC Duplex / SC-Duplex, protection type: IP20, for installation in cable ducts or control cabinets, length: 5 meters
2901811	FL MM PATCH 5,0 SC-ST	Assembled FO cable, break out cable, multi-mode glass fiber 50/125 µm, connector: SC Duplex / B-FOC (ST), protection type: IP20, for installation in cable ducts or control cabinets, length: 5 meters
1402193	FOC-GDM-RUGGED-1016/...	rugged GOF installation cable for inner areas with highly tear-proof aramid strain-relief elements. Individual elements consist of highly flexible FRNC material. The cable is halogen-free, ozone and UV resistant and has a rugged polyurethane (PUR) outer sheath.
2901558	FOC-GDM-RUGGED-1016/IP20/...	rugged GOF installation cable (IP20 heads only) for inner areas with highly tear-proof aramid strain-relief elements. Individual elements consist of highly flexible FRNC material. The cable is halogen-free, ozone and UV resistant and has a rugged polyurethane (PUR) outer sheath.
1402194	FOC-GDO-1017/...	Highly rugged GOF round cable for assembly and for outdoor installation with integrated moisture barrier as well as rodent-proof scrim. Individual elements made from highly flexible FRNC material. The wire is ozone and UV resistant with a very rugged polyethylene outer sheath.
2901559	FOC-GDO-1017/IP20/...	Highly rugged GOF round cable (IP20 heads only) for assembly and for outdoor installation with integrated moisture barrier as well as rodent-proof scrim. Individual elements made from highly flexible FRNC material. The wire is ozone and UV resistant with a very rugged polyethylene outer sheath.
1402189	FOC-PN-HCS-GI-1005/...	HCS-GI installation cable for assembly for fixed installation in the inner area, with gradient index fibers for the highest performance requirements, as well as individual elements made of highly flexible FRNC material. The cable is halogen-free, ozone and UV resistant and has a rugged polyurethane (PUR) outer sheath.
2901554	FOC-PN-HCS-GI-1005/IP20/...	HCS-GI installation cable (IP20 heads only) for assembly for fixed installation in the inner area, with gradient index fibers for the highest performance requirements, as well as individual elements made of highly flexible FRNC material. The cable is halogen-free, ozone and UV resistant and has a rugged polyurethane (PUR) outer sheath.
2799322	PSM-LWL-GDM-RUGGED-50/125	Glass fiber cable, duplex 50/125 µm, by the meter, without connector, for indoor installation
2799432	PSM-LWL-GDO- 50/125	Glass fiber cable, duplex 50/125 µm, by the meter, without connector, for outdoor installation
2744911	PSM-LWL/GDM-RUGGED	Glass fiber cable, duplex 50/125 µm, by the meter, with connector, for indoor installation

2744924	PSM-LWL/GDO	Glass fiber cable, duplex 50/125 µm, by the meter, with connector, for outdoor installation
---------	-------------	---

Diagrams/Drawings

Dimensioned drawing

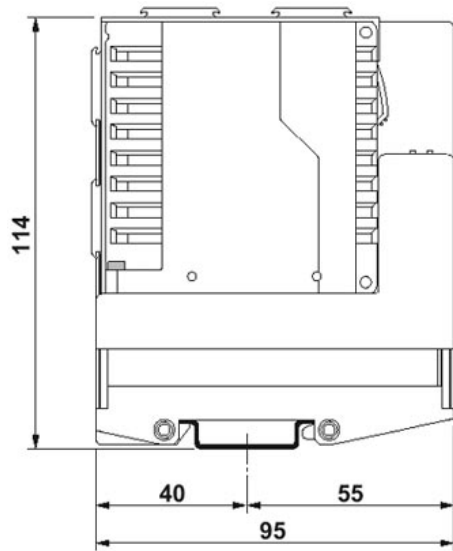

The illustration shows a version of the interface module with the head station FL SWITCH MM HS

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;